

XINSPower GROUP LIMITED
SHENZHEN XINSPower TECHNOLOGY CO., LTD.

Add: The 2nd-4th Floor, The 2nd Building, Xin Hao Sheng Da Yang Technology Park, Fu Rui Road No.11, Qiao Tou Community, Fu Hai Street, Bao An District, Shenzhen, China
Tel: +86-755-2321-2520 Fax: +86-755-2350-0926
Email: gm@xinspower.com Web: www.xinspower.com



official website

XinSPower



PROFESSIONAL CHARGER
MANUFACTURER SINCE 2008

GaN Charger | PD Charger | Power Strip | Wireless Charger | Car Charger

CHARGER CATALOG

www.xinspower.com
www.xinspowertech.com



ABOUT US

Established in 2008, Xinspower has over 12000sqm of modernized production base and more than 500 skilled workers, including 50 experienced manage and technical personnel.

Advanced manufacturing equipment and whole-process quality control ensures monthly capacity reach 1 million pieces of products. These products are certified by UL/CUL/F-CC/CE/CB/SAA/C-tick/RCM/PSE/KC/GS etc.OEM and ODM projects are also welcomed.

Xinspower is devoted to provide their clients best products and excellent service through control all procedure from raw material purchasing, production, inspection, packaging to final shipment.

- **15** Years of R & D and Production Experience
- **500** Employees with 50 Dedicated R&D Engineers
- **12,000** SQM. Manufactory Space
- **1,000,000** PCS Production Capacity
- **ISO9001: 2015 & ISO14000: 2015**
Quality & Environmental Management System Certificated
- **ERP:** Manufacturing System | **MES:** Quality Management
SRM: Purchasing Management | **IPD:** R&D Management

CONTENTS

01

ABOUT XINSPower

Certification	01
Company honor	02
Customized case	03
Main customer	04
Quality control	05

02

GaN CHARGER

35W 1C/1C1A/2C	06-08
45W 2C	08
65W 1C/1C1A/2C/3C1A	09-11
100W 2C1A/3C1A/4C2A1W	12-14
140W 2C/2C1A	14-15
200W 4C2A	16
240W 4C	16

03

PD CHARGER

20W Low price series	17
20W 1C/1C1A	17-18
30W 1C/1C1A	18-19
45W 1C/1C1A	20-21
65W 1C/1C1A/2C2A1W	22-24

04

POWER STRIP

PA6512E 3C3AC	24
PA6513E 2C1A3AC	24
PA6510E 3C2A3AC	25
PA1301E 3C2A3AC	25

05

WIRELESS CHARGER



W01/W02	26
W10/W11	27
W12/W13	28
W14/W15	29

06

CAR CHARGER

USB-C13-D-DX, USB-C13-E-DX	30
Car charger with cable	30
B2-B, USB-C16-A16	31
USB-C13-D13	31
USB-C13-E13, USB-C13-G	32
USB-C13-A13, SA-X01, SC-G10	33
AJ-A16, C7-B, HE-A	34
USB-C22-A, SC-R, USB-C13-F	35
AJ-B16, C8-K, HSX-B3	36

Certification

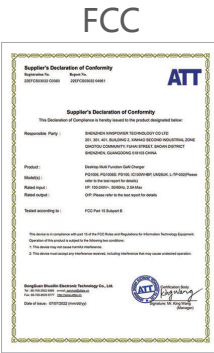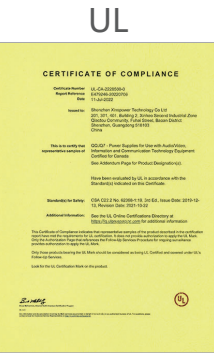

High and new tech enterprises




Invention patent




Design patent



Utility model patents

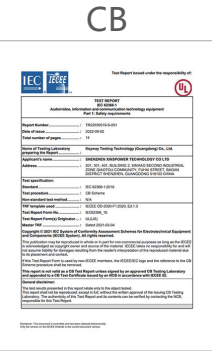

The world's first PD3.1 140W non-apple UL certification holder



BSCI



ISO 9001:2015



Copyright



Customized Case



Main Customer



Quality Control


Office



Production line



Function test

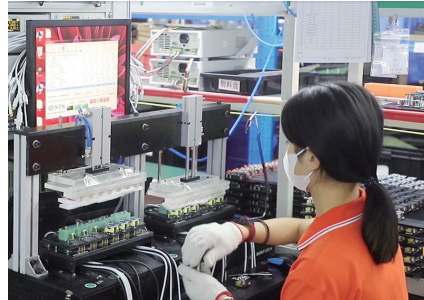

Testing lab



Automatic aging test



Warehouse



PN351E

GaN | 35W | 1USB-C | PD3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
Color: White, Black or OEM
Size: 43x32x31mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PN352E

GaN | 35W | 1USB-C | PD3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max) 3.3-11V 3A (PPS)
Color: White, Black or OEM
Size: 40.5x40x28mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ351E

GaN | 35W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A,
 20V 1.75A(35W Max) 3.3-11V 3A(PPS)
 USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
 USB-C+USB-A Output: 5V 3.1A(15.5W Max)
 Color: White, Black or OEM
 Size: 48.5x32x31mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ352E

GaN | 35W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A,
 20V 1.75A(35W Max) 3.3-11V 3A (PPS)
 USB-A Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A (30W Max)
 USB-C+USB-A Output: 5V 4A (20W Max)
 Color: White, Black or OEM
 Size: 40.5x40x28mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PT352E/PT352SE

GaN | 35W | 2USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 Color: White, Black or OEM
 Size: 40.5x40x28mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC
 Model: PT352E
 C1,C2 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2.33A, 20V 1.75A(35W Max)
 3.3-11V 3A (PPS)
 C1+C2 Output: 5V 4A (20W Max)
 Model: PT352SE
 C1, C2 Output: 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A,
 20V 1.75A(35.04W Max) 3.3-11V 3A (PPS)
 C1+C2 Output: With Dynamic Allocation
 C1+C2=20W Max+15W Max=35W Max, C1+C2=15W Max+20W Max=35W Max
 C1+C2=25W Max+10W Max=35W Max, C1+C2=10W Max+25W Max=35W Max
 C1+C2=18W Max+17W Max=35W Max, C1+C2=17W Max+18W Max=35W Max



PT454E

GaN | 45W | 2USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 2.25A(45W Max) 3.3-16V 3A (PPS)
 C1+C2 Output: With Dynamic Allocation
 C1+C2=20W Max+20W Max
 C1+C2=25W Max+18W Max
 C1+C2=18W Max+25W Max
 C1+C2=35W Max+5W Max
 C1+C2=5W Max+35W Max
 Color: White, Black or OEM
 Size: 32x36x48mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PN651E

GaN | 65W | 1USB-C | PD3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
20V 3.25A(65W Max) 3.3-11V 4.05A (PPS)
Color: White, Black or OEM
Size: 50x40x28mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PT652E

GaN | 67W | 2USB-C | PD3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
20V 3.35A(67Wmax)
C1+C2 Output: With Dynamic Allocation
C1+C2=45W+20W Max, C1+C2=20W+45W Max
C1+C2=35W+30W Max, C1+C2=30W+35W Max
Color: White, Black or OEM
Size: 50x50x29mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PT654E

GaN | 65W | 2USB-C | PD3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
20V 3.25A(65W Max) 3.3-11V 5A (PPS)
C1+C2 Output: With Dynamic Allocation
C1+C2=45W Max+20W Max
C1+C2=20W Max+45W Max
C1+C2=30W Max+30W Max
Color: White, Black or OEM
Size: 32x30x64mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ656E

GaN | 65W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
Input: AC100-240V, 50/60Hz
USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
20V 3.25A(65W Max) 3.3-11V 5A (PPS)
USB-A Output: 5V 3A, 9V 2A, 12V 1.5A (18W Max)
USB-C+USB-A Output: 45W +18W (63W Max)
Color: White, Black or OEM
Size: 66x41x29mm
Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ655E

GaN | 65W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,

20V 3.25A(65W Max) 3.3-11V 5A (PPS)

USB-A Output: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 2.5A,

20V 1.5A(30W Max)

C1+C2 Output: 45W +18W (63W Max)

C1+USB-A Output: 45W +18W (63W Max)

C2+USB-A Output: 5V 3A(15W Max)

C1+C2+USB-A output: C1 45W+(C2+USB-A)5V 3A(60W Max)

Color: White, Black or OEM

Size: 66x41x29mm

Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ657E

GaN | 65W | 3USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A

20V 3.25A(65W Max) 3.3-11V 5A (PPS)

C3 Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)

3.3-11V 3A, 3.3-11V 2A (PPS)

USB-A Output: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 2.5A, 20V 1.5A (30W Max)

C1+C2 Output: 45W+20W(65W Max), C1+C3 output: 45W+20W(65W Max)

C2+C3 Output: 45W+20W(65W Max), C1+USB-A output: 45W+18W(63W Max)

C2+USB-A Output: 45W+18W(63W Max), C3+USB-A output: 5V 3A(15W Max)

C1+C2+C3 Output: 20W+20W+20W(60W Max)

C1+C2+USB-A Output: 20W+20W+18W(58W Max)

C1+C2+(C3+USB-A) Output: 20W+20W+15W(55W Max)

Color: White, Black or OEM

Size: 50x50x29mm

Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ1005E

GaN | 100W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,

20V 5A(100W Max) 3.3-20V 5A (PPS)

USB A Output: 5V 3A, 9V 3A, 12V 2.5A(30W Max)

C1+C2 Output=65W+30W (95W Max)

C1+USB A Output=65W+30W(95W Max)

C2+USB A Output=10W+10W(20W Max)

C1+C2+USB A Output=65W+10W+10W(85W Max)

Color: White, Black or OEM

Size: 83.5x42.5x33mm

Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ1005D

GaN | 100W | 2USB-C+1USB-A | PD3.0 | QC3.0 | Home Charger

Input: AC100-240V, 50/60Hz

C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max)

3.3-20V 5A (PPS)

USB A Output: 5V 3A, 9V 3A, 12V 2.5A(30W Max)

C1+C2 Output=65W+30W (95W Max)

C1+USB A Output=65W+30W(95W Max)

C2+USB A Output=10W+10W(20W Max)

C1+C2+USB A Output=65W+10W+10W(85W Max)

Color: White, Black or OEM

Size: 86.8x42.5x33mm

Certification: CE, CB, UL, FCC, PSE, KC, CCC



PQ1004E Pro

GaN | 100W | 3USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 C1 Output: 5V 3A 9V, 3A 12V, 3A 15V, 3A 20V 5A(100W Max)
 C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max) 3.3-11V 4.05A (PPS)
 C3 Output: 5V 3A, 9V 2.22A, 12V 1.5A(20W Max)
 USB-A Output: 4.5V 5A, 5V 4.5A, 9V 2A, 12V 1.5A(22.5W Max)
 C1+C2 Output: 60W+30W(90W Max), C1+C3 Output: 60W+20W(80W Max)
 C1+A Output: 60W+22.5W(82.5W Max), C2+C3 Output: 45W+20W(65W Max)
 C2+USB A Output: 45W+22.5W(67.5W Max), C3+USB A Output: 5V 4A(20W Max)
 C1+C2+C3 Output: 45W+30W+20W(95W Max)
 C1+C2+USB A Output: 45W+30W+22.5W(97.5W Max)
 C1+(C3+USB A) Output: 60W+20W(80W Max)
 C2+(C3+USB A) Output: 45W+20W(65W Max)
 C1+C2+(C3+USB A) Output: 45W+30W+20W(95W Max)
 Color: White, Black or OEM
 Size: 75x60x29mm
 Certification: CB, UL, FCC, PSE, KC, CCC



PQ1006D

GaN | 100W | 4USB-C+2USB-A+1Wireless | PD3.0 | QC3.0 | Home Charger
 Input: AC100-240V, 50/60Hz
 C1,C2 output: 5V 3A, 9V 3A, 12V 3A, 15V 3A
 20V 5A(100W Max) 3.3-21V 5A (PPS)
 C3, C4 Output: 5V 3A 9V 3A 12V 2.5A 15V 2A
 20V 1.5A(30W Max) 3.3-11V 2.75A (PPS)
 A1, A2 Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 Wireless Output: 15W Max
 Color: White, Black or OEM
 Size: 120x85x28mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PN1014E

GaN | 100W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 PD Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A (100W Max)
 Certification: CE, CB, UL, FCC, PSE, CCC
 Size: 68x68x31mm



PT1401E

GaN | 140W | 2USB-C | PD3.1 | Wall Charger
 Input: AC100-240V, 50/60Hz
 C1,C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 28V 5A(140W Max) 3.3-21V 5A(PPS)
 C1+C2 Output: 100W+20W(120W Max)
 Color: White, Black or OEM
 Size: 73.2x73x29mm
 Certification: CE, CB, UL, FCC, PSE, KC, UKCA, SAA+RCM+C-tick, CCC



PQ1401E

GaN | 140W | 2USB-C+1USB-A | PD3.1 | QC3.0 | Wall Charger

Input: AC100-240V, 50/60Hz

C1 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A,

28V 5A(140W Max) 3.3-21V 5A (PPS)

C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max)

3.3-21V 5A(PPS)

USB A Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)

C1+C2: 100W+20W (120W Max), C1+USB A: 100W+18W(118W Max)

C2+USB A: 5V 4A(20W Max)

C1+(C2+USB A): 100W+20W(5V 4A) (120W Max)

Color: White, Black or OEM

Size: 73.2x73x29mm

Certification: CE, CB, UL, FCC, PSE, KC, UKCA, SAA+RCM+C-tick, CCC



PD2001D

GaN | 200W | 4USB-C+2USB-A | PD3.0 | Home Charger

Input: AC100-240V, 50/60Hz, 3.5A Max

C1/C2/C3 Output: 5V 3A, 9V3A, 12V 3A, 15V 3A,

20V 5A(100W Max)

A1/A2 Output: 5V 3A, 9V3A, 12V 2.5A, 20V 1.5A(30W Max)

Size: 100.7x100.6x32 mm

Certification: CE, CB, UL, FCC, PSE, KC, SAA, RCM, CCC



PD2401D

GaN | 240W | 4USB-C | PD3.1 | Home Charger

Input: AC100-240V, 50/60Hz, 3.5A Max

C1/C2/C3/C4 Output: 5V 3A, 9V3A, 12V 3A, 15V 3A,

20V 5A, 28V 5A(140W Max)

C1+C2 or C3 or C4: 140W+100W(240W Max)

C1+C2+C3: 140W+65W+30W(235W Max)

C1+C2+C4: 140W+65W+30W(235W Max)

C1+C3+C4: 140W+65W+30W(235W Max)

C1+C3+C2+C4: 140W+30W+30W+30W(230W Max)

Size: 140x72x31 mm

Certification: CE, CB, UL, FCC, PSE, KC, SAA, RCM, CCC



PN201L

20W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 2.22A, 12V 1.67A(20W Max)
 Color: White, Black or OEM
 Size: 47.1x28x27.5mm(Fixed US plug)
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PN205E

20W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 2.22A, 12V 1.67A(20W Max)
 Color: White, Black or OEM
 Size: 58.7x41.3x29mm(Fixed US plug)
 Certification: CB, CE, UL, FCC, PSE, KC, CCC

PQ205E

20W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 2.22A, 12V 1.5A(20W Max)
 3.3-5.9V 3A (PPS)
 USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
 USB-C+USB-A Output: 5V 3.1A(15.5W Max)
 Color: White, Black or OEM
 Size: 41.1x41.3x28.9mm
 Certification: CE, CB, ETL, PSE, KC, CCC



PN303E

30W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A,
 20V 1.5A(30W Max) 3.3-5.9V 3A, 3.3-11V 2.5A(PPS)
 Color: White, Black or OEM
 Size: 57.9x53.1x29.2mm
 Certification: CE, UL, FCC, PSE, KC, CCC





PS303E

30W | 1USB-C+1USB-A | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A,
 20V 1.5A(30W Max) 3.3-5.9V 3A, 3.3-11V 2.5A(PPS)
 USB-A Output: 5V 2.4A(12W Max)
 USB-C+USB-A Output: 18W+12W=30W Max
 Color: White, Black or OEM
 Size: 57.9x53.1x29.2mm
 Certification: CE, UL, FCC, CB, PSE, KC, CCC



PQ303E

30W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A,
 20V 1.5A(30W Max) 3.3-5.9V 3A, 3.3-11V 2.5A(PPS)
 USB-A Output: 5V 3A, 9V 3A, 12V 2.5A(30W Max)
 USB-C+USB-A Output: 5V 5A(25W Max)
 Color: White, Black or OEM
 Size: 57.9x53.1x29.2mm
 Certification: CE, CB, UL, FCC, PSE, KC, CCC



PN453E

45W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 2.25A(45W Max) 3.3-16V 3A(PPS)
 Color: White, Black or OEM
 Size: 60.7x60.5x28.3mm
 Certification: CE, CB, UL, FCC, KC, PSE, UKCA,
 SAA+RCM+C-tick, CCC



PS453E

45W | 1USB-C+1USB-A | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A,
 20V 1.5A(30W Max) 3.3-16V 3A(PPS)
 USB-A Output: 5V 2.4A(12W Max)
 USB-C+USB-A Output: 30W+12W=42W Max
 Color: White, Black or OEM
 Size: 60.7x60.5x28.3mm
 Certification: CE, CB, UL, FCC, KC, PSE, UKCA,
 SAA+RCM+C-tick, CCC



PQ453E

45W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 2.25A, 15V 1.8A,
 20V 1.35A(27W Max) 3.3-16V 3A(PPS)
 USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
 USB-C+USB-A Output: 27W+18W=45W Max
 Color: White, Black or OEM
 Size: 60.7x60.5x28.3mm
 Certification: CE, CB, UL, FCC, PSE, KC, UKCA, SAA+RCM+C-tick, CCC



PN653E

65W | 1USB-C | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.25A(65W Max) 3.3-11V 5A(PPS)
 Color: White, Black or OEM
 Size: 65x60.7x28.7mm
 Certification: CE, CB, ETL, FCC, PSE, KC, CCC



PS653E

65W | 1USB-C+1USB-A | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.25A(65W Max) 3.3-11V 5A(PPS)
 USB-A Output: 5V 2.4A(12W Max)
 USB-C+USB-A Output: 45W+12W=57W Max
 Color: White, Black or OEM
 Size: 65x60.7x28.7mm
 Certification: CE, CB, ETL, FCC, KC, PSE, CCC



PQ653E

65W | 1USB-C+1USB-A | PD3.0 | QC3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.25A(65W Max) 3.3-11V 5A(PPS)
 USB-A Output: 5V 3A, 9V 2A, 12V 1.5A(18W Max)
 USB-C+USB-A Output: 45W+18W=63W Max
 Color: White, Black or OEM
 Size: 65x60.7x28.7mm
 Certification: CE, CB, ETL, FCC, KC, PSE, CCC



PQ659D

65W | 2USB-C+2USB-A+1Wireless | PD3.0 | QC3.0 | Home Charger
 Input: 100-240V, 50/60Hz
 USB-C1/C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.25A (65W Max) 3.3-11V 5A (PPS)
 USB-A1/A2 Output: 4.5V 5A, 5V 4.5A, 9V 2A, 12V 1.5A(22.5W Max)
 Wireless Output: 5W/7.5W/10W
 Color: White, Black or OEM
 Size: 160x68x33.9mm
 Certification: CB, CE, UL, FCC, KC, PSE, CCC



P6514E

65W | With Fixed Type-C Cable | PD3.0 | Wall Charger
 Input: AC100-240V, 50/60Hz
 USB-C Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.25A(65W Max) 3.3-11V 5A(PPS)
 Color: White, Black or OEM
 Size: 64.3x64.6x30mm
 Certification: CE, CB, UL, FCC, PSE, KC, UKCA, CCC



PA6512E

GaN I 67W I 3USB-C+3AC I PD3.0 I Home Charger
 3AC Output Total: 250V 16A, 3520W Max
 USB-C1/C2/C3 Ouput: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.35A(67W Max) 3.3V-11V 5A(PPS)
 C1+C2 or C3: 45W+20W(With Dynamic Allocation)
 C1+C2+C3: 20W+20W+20W Max
 Size: 76.2x76.2x77mm
 Certification: CE, IEC Report



PA6513E

GaN I 67W I 2USB-C+1USB-A+3AC I PD3.0 I Home Charger
 3AC Output Total: 250V 16A, 3520W Max
 USB-C1/C2 Ouput: 5V 3A, 9V 3A, 12V 3A, 15V 3A,
 20V 3.35A(67W Max) 3.3V-11V 5A(PPS)
 USB-A Ouput: 4.5V 5A, 5V 4.5A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 C1+C2: 45W+20W(With Dynamic Allocation)
 C1+C2+A: 20W+20W+18W Max
 Size: 76.2x76.2x77mm
 Certification: CE, IEC Report



PA6510E

GaN I 65W I 3USB-C+2USB-A+3AC I PD3.0 I QC3.0 I Home Charger
 3AC Output Total: 250V/16A, 3520W Max
 C1/C2/C3 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(65W Max)
 A1/A2 Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 C1+(C2/C3/A1/A2): 45W+20W(65W Max)
 (C1/C2/C3)+(A1+A2): 45W+20W(65W Max)
 C1+(C2/C3)+(A1+A2): 30W+20W+15W(65W Max)
 C1+C2+C3+(A1+A2): 18W+18W+18W+10W(65W Max)
 Certification: CE, IEC Report
 Size: 163x103x32mm



PA1301E

GaN I 130W I 3USB-C+2USB-A+3AC I PD3.0 I QC3.0 I Home Charger
 3AC Output Total: 250V/16A, 3520W Max
 C1/C2/C3 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A(100W Max)
 A1/A2 Output: 5V 3A, 9V 3A, 12V 2.5A, 20V 1.5A(30W Max)
 C1+C2: 65W+65W(130W Max)
 C1+(C3/A1/A2): 100W+30W
 C1+C2+(C3/A1/A2): 65W+30W+20W
 C1+C2+C3+(A1/A2): 45W+30W+20W+20W
 C1+C2+C3+A1+A2: 45W+30W+20W+10W+10W
 Certification: CE, IEC Report
 Size: 163x103x32mm



W01

Input: 5V 2A, 9V 2A
 Output: 5V 1A, 9V 1.67A 15W (5W, 7.5W, 10W)
 Charging Port: USB-C
 Color: White, Black, OEM
 Size: Φ88x8.3mm



W02

Input: 5V 2A, 9V 2A
 Output: 5V 1A, 9V 1.67A 15W (5W, 7.5W, 10W)
 Charging Port: USB-C
 Color: White, Black, OEM
 Size: Φ88x8.3mm



W10

Input: 9V 2-3A, 12V 1.5-2A (Max)

Wireless output:

Mobile phone: 15W, 10W, 7.5W, 5W

Bluetooth: 5W Max

Smart Watch: 3W Max

Charging Port: USB-C

Color: White, Black, Custom Made

Size: 148x90x20mm



W11

Input (USB-C): 9.0V 2A 12V 2A

Output:

Top: 5V=0.6A 3W Max

Front: 9V=1.67A 15W Max

Back: 5V=1A 5W Max

Charging Port (USB-C): USB A to C & C to C

Color: White, Black, OEM



W12

Input (USB-C): 9.0V 2A 12V 2A

Output:

Top: 5V=0.6A 3W Max

Front: 9V=1.67A 15W Max

Back: 5V=1A 5W Max

Charging Port (USB-C): USB A to C & C to C

Color: White, Black, OEM



W13

Input (USB-C): 9.0V 2A 12V 2A

Output:

Top: 5V=0.6A 3W Max

Front: 9V=1.67A 15W Max

Back: 5V=1A 5W Max

Charging Port (USB-C): USB A to C & C to C

Color: White, Black, OEM



W14

Input: 5V 2A, 9V 2A
Output: 5V 1A, 9V 1.67A
Charging Port: USB-C
Color: White, Black, OEM



W15

Input: 5V 2A, 9V 2A
Output: 5V 1A, 9V 1.67A
Charging Port: USB-C
Color: White, Black, OEM



USB-C13-D-DX

Input: DC 12V-24V
USB-C1/C2 Output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A
The Total Output: 45W Max
Material: Zinc alloy/Aluminium alloy
Color: Black, Tarnish

USB-C13-E-DX

Input: DC 12V-24V
Output:
USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A
USB-C: 5V/2.4A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
The Total Output: 5V/4.8A Max.
Material: Zinc alloy/Aluminium alloy
Color: Black, Tarnish

Car charger with cable

Input: DC 12V-24V
Output:
USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A
USB-C1+USB-A: 100W
USB-C2+USB-A: 5V/5A
USB-C1+USB-C2: 65W Max+45W Max.
USB-C1+USB-C2+USB-A: 65W+5V/5A
Material: Aluminium alloy
Color: Black





B2-B

Input: DC 12V-24V

Output:

USB-C1/C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A

USB-C1+USB-C2: 30W+30W

The Total Output: 65W Max

Material: Aluminium alloy

Color: Black



USB-C16-A16

Material: Aluminium alloy

Color: Black

Input: DC 12V-24V

Output:

USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/3A

USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.35A

PPS: 3.3-11V 3.35

USB+USB-C: 5V/5A



USB-C13-D13

Input: DC 12V-24V

USB-C1 Output: 4. 5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A

USB-C2 Output: 5V/2.4A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

The Total Output : 5V/4.8A

Material: Zinc alloy+PC

Color: Black, Tarnish

USB-C1/C2 Output: 5V3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A

The Total Output: 45W max

Material: Aluminium alloy

Color: Black



USB-C13-E13

Input: DC 12V-24V

Output:

USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A

USB-C: 5V/2.4A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

The Total Output: 5V/4.8A Max.

Material: Zinc alloy+PC

Color: Black, Tarnish

Input: DC 12V-24V

Output:

USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/3A

USB-C: 5V/2.4A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A

The Total Output: 5V/4.8A Max.

Material: Zinc alloy+PC

Color: Black, Tarnish

USB-C13-G

Input: DC 12V-24V

Output:

USB-A: 5V/3A, 9V/2A, 12V/1.5A

USB-C: 5V/2.4A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

The Total Output: 48W

Material: Zinc alloy+PC

Color: Black, Silver, Tarnish



USB-C13-A13

Input: DC 12V-24V
Output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
The Total Output: 30W

Input: DC 12V-24V
Output: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A, 20V/1.5A
The Total Output: 30W

Input: DC 12V-24V
Output: 5V/2.4A, 9V/2.25A, 12V/1.67A
The Total output: 20W

SA-X01

Input: DC 12V-24V
Output:
USB-C1: 5V/3A, 9V/2.22A, 12V/1.67A
USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/2.4A, 20V/1.8A
The Total Output: 48W
Material: Aluminium alloy
Color: Black

SC-G10

Input: DC 12V-24V
Output:
USB-A: 5V/3A, 9V/2A, 12V/1.5A
USB-C: 5V/2.4A, 9V/3A, 12V/3A, 15V/2.4A, 20V/1.8A
The Total Output: 54W
Material: Zinc alloy+ Copper
Color: Black, Silver, Red



AJ-A16

Input: DC 12V-24V
Output:
USB-A: 5V/3A, 9V/2A, 12V/1.5A
USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
The Total Output : 48W
Material: Aluminium alloy
Color: Black

C7-B

Input: DC 12V-24V
QC+PD: 38W
QC Output: 5V/3A, 9V/2A, 12V/1.5A
PD Output: 5V/2.4A, 9V/2.25A, 12V/1.67A
Material: Zinc alloy
Color: Tarnish, Silver, Black

HE-A

Input: DC 12V-24V
Output:
USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/3A
USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
USB-A+USB-C: 5V/4.8A
Material: Aluminium alloy
Color: Black





SC-R

Input: DC 12V-24V

Output: USB: 5V/3A, 9V/2A, 12V/1.5A

USB-C: 5V/2.4A, 9V/2.22A, 12V/1.67A

USB+USB-C: 5V/3A

Material: V0 fireproof PC

Color: Black, White



USB-C13-F

Input: DC 12V-24V

Output: USB-A: 5V/3A, 9V/2A, 12V/1.5A

USB-C: 5V/3A, 9V/3A, 12V/2.5A

The Total Output: 5V/3A Max.

Material: PC

Color: Black, White, Red, Yellow, Green, Blue



USB-C22-A

Input: DC 12V-24V

Output: USB-A: 5V/3A, 9V/2A, 12V/1.5A

USB-C: 5V/3A, 9V/3A, 12V/2.5A

The Total Output: 5V/3A Max.

Material: PC

Color: Black



AJ-B16


Input: DC 12V-24V

Output voltage: 5V

Output Current: 4.8A

Material: Aluminium alloy

Color: Black

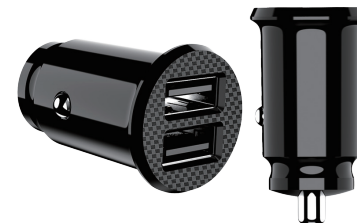

C8-K

Input: DC 12V-24V

Output voltage: 5V

Output Current: 3.1A

Material: V0 level PC

Color: Black, White



HSX-B3

Input: DC 12V-24V

Output:

USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A

USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/2.4A, 20V/1.8A

USB-C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

The Total Output:

USB-A/USB-C2+USB-C1=30W+36W(66W Max)

Material: Zinc alloy

Color: Black